

## Hydraulic Excavator Pump Attachment - 6 Inch

### MODEL #

6-Inch EXH 6000 Hydraulic Excavator Attachment

### OPERATING LEVELS

MIN FLOW	450 GPM
MAX FLOW	2000 GPM
HEAD RANGE	Up to 200 ft
DISCHARGE SIZE	6 inch
SUCTION SIZE	8 inch
SOLIDS HANDLING	Solids up to 5 inches
MAX SPEED	1800 RPM
PERCENT SOLIDS	Up to 40-70% Solids
CU YD MATERIAL HR	150-200



\*Typical Attachment Photo. Photos for general guidance. Contact us for further details.

### RECOMMENDED SENSORS

Hydraulic Pressure Gauge for pumps and cutter head circuit to operator (0-6000 PSI)

Magnetic Flow meter to maintain stable plug free pipeline flow and maximize production

### REQUIRED EQUIPMENT TO OPERATE ATTACHMENT

EDDY Pump circuit requirements from excavator auxiliary power OR from Hydraulic Power Unit 75 GPM at 4000 PSI (180cc motor)

Cutterhead circuit requirements from excavator auxiliary power OR from Hydraulic Power Unit 12-20 GPM at 5000 PSI

6" material handling discharge hose and hydraulic lines plumbed out to the end of the boom

Crossover check valve to prevent damage to hydraulic motor and prevent pump rotor from coming off

### OPTIONAL EQUIPMENT TO ENHANCE OPERATION OF DREDGE

Magnetic flow meter


Discharge line pressure gauge (0-150 psi)

"Quick Prime" Valve (requires small 24volt air system)

Pivot mounted Discharge hose carrier (adaptable to most machines)

Liner Safe Roller Attachment, Self Cleaning Mud Guard, Water Jetting Ring are additional options for your project.

Recirculation system for pre-mixing applications (requires small 24 volt air system)

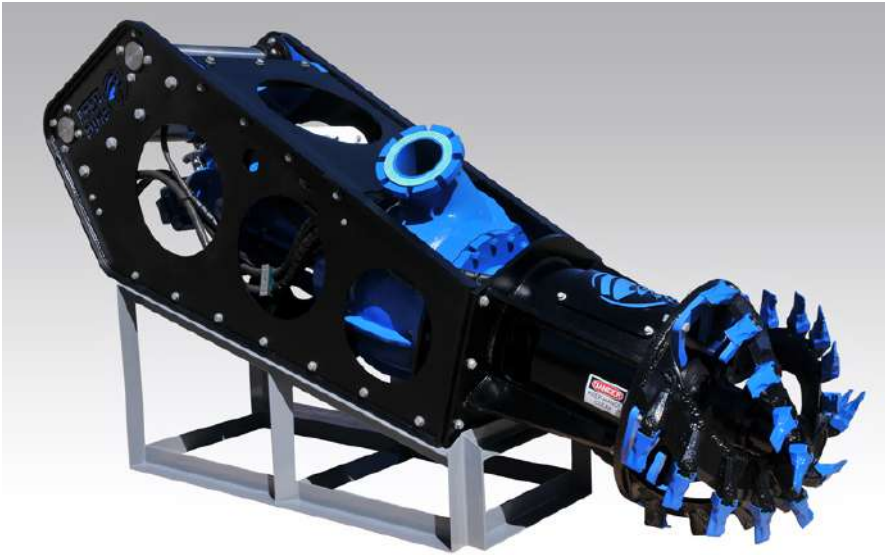

**EDDY Pump industrial Excavator Dredge Pump Attachments** are non-clog pumps designed for high solids industrial pumping applications. Our patented pump technology outperforms all centrifugal, vortex and positive displacement pumps in a variety of the most difficult pumping applications.

Available in alternative power options and pump sizes depending on your application.

**Applications**

- Mining
- Chemical
- Sand & Agg
- Oil and Gas
- Paper & Pulp
- Fly Ash & Coal Ash

**Features and Benefits**

- Non-Clog, High Viscosity, High Specific Gravity, High Abrasives, Low pH Pumping Design
- Transport 40-70% Solids
- Ability to pump objects of up to 9-inches in diameter

**Fluid Pumped**

- Sludge
- Slurry
- Drilling Mud
- Mine Tailings
- Grit
- Sand Mixtures

GENERAL SPECS		
Production: 1500-2000 GPM or 150-200 cubic yards of material per hour		
Head with 180cc hydraulic motor (16" rotor)	Up to 200 feet	Up to 61m
Overall Weight (without optional equipment)	4,800 lbs	2,177 kg
Overall Length	113 inches	3.37 m
Overall Height	37 inches	.94 m
Overall Width with discharge pipe removed	28 inches	0.71 m
Overall Width with discharge pipe mounted (right side)	38 inches	0.96 m
Carrier Weight Range	20-45 tons	18,000-40,000 kg
Rotating Head Diameter (with or without cutting teeth)	18 inches	.46m
Double seal with Sealed Barrier fluid tank (allow dry run)	3 inch	76.2 mm




## PUMP CURVE

A pump curve is a graphical representation of a pumps ability to produce flow against a certain head. The science is matching a curve that is accurate for your project, leading to the proper pump selection and best efficiency.

**EDDY Pumps** are primarily used for high solids, slurry, sludge, and dewatering.

**EDDY Pump - 6 Inch EXH 6000 Hydraulic Excavator Attachment - Pump Curve**

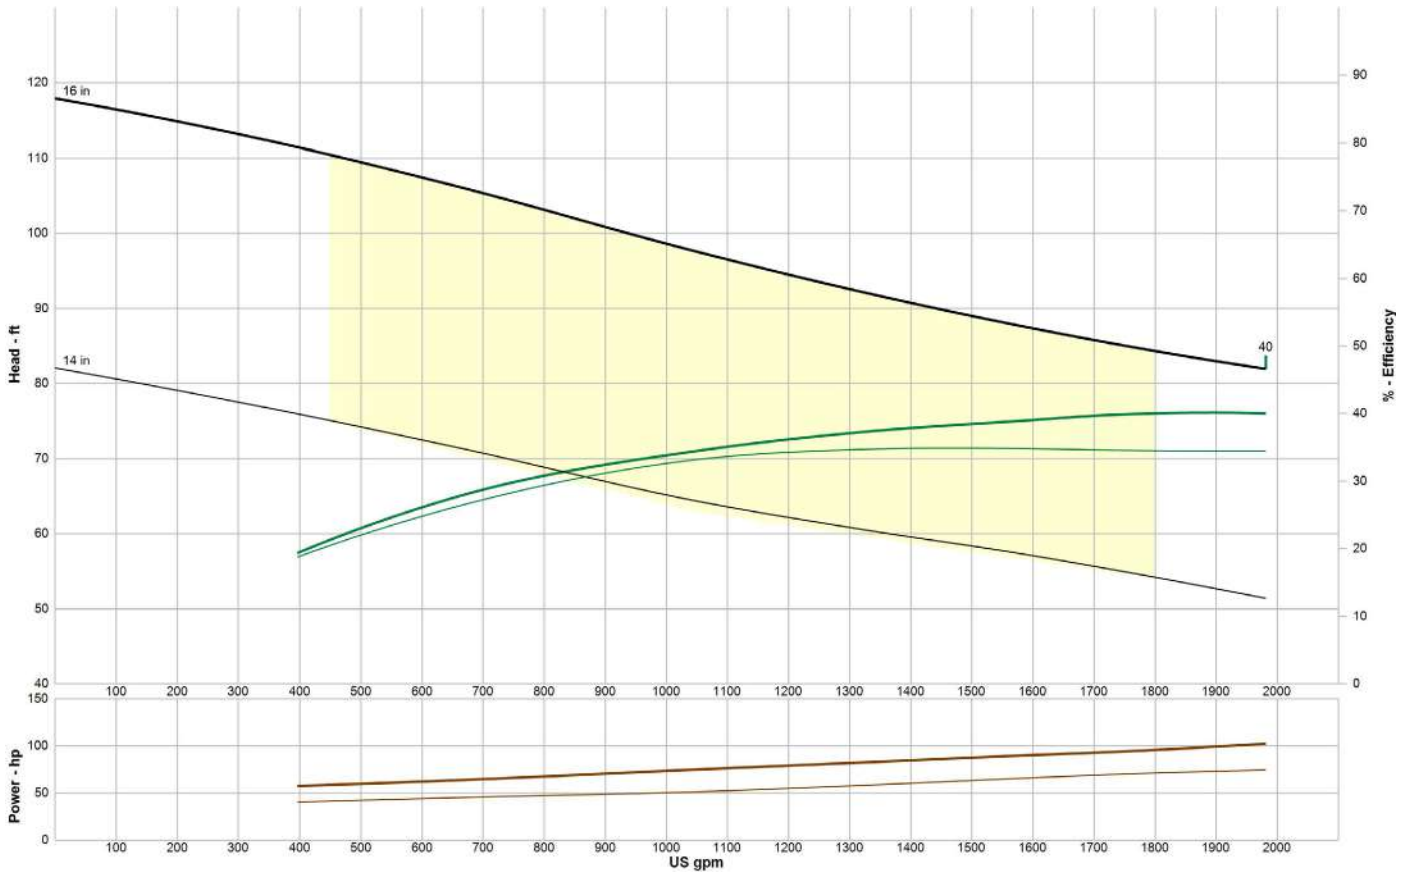

\*General pump curve based on water at 1200 RPM. Contact us with your specific material for a custom pump curve.

# WE PUMP SOLIDS, NOT WATER

**CONTACT US**



**(619) 258-7020**



**info@EddyPump.com**