

Self-Priming Pump - 6 Inch 118/125-HP

MODEL

6-Inch DSP/HD 6000 118/125-HP Self Priming Pump

STANDARD CONFIGURATION

- 6-Inch EDDY Pump
- 118/125-HP John Deere Diesel Engine
- 6k Single Axle Trailer w/ 16" 10ply Trailer Tires
- 96 Gallon Fuel Cell
- 3 Position 2-5/16 HD Hitch
- Over the Road Light Package
- Integrated Lifting Bail w/ Dual 8k Leveling Jacks
- Accessories: Work Light, Flow Gauge & 4 D-Ring Tie Downs



*Typical Deployment Photo. Dredge pumps can be deployed vertically or horizontally. Photos for general guidance. Contact us for further details.

PUMP SPECS

MIN FLOW	450 GPM
MAX FLOW	2000 GPM
HEAD RANGE	Up to 200 ft
DISCHARGE SIZE	6 inch
SUCTION SIZE	8 inch
SOLIDS HANDLING	Solids up to 5 inches
MAX SPEED	1800 RPM
PERCENT SOLIDS	Up to 40-70% Solids

PARTS

PARTS	STANDARD MATERIALS
ROTOR	High Chrome 28%, Ductile Iron, Stainless Steel, Duplex Stainless - Various sizes and custom metals available
VOLUTE CASING	High Chrome 28%, Ductile Iron, Stainless Steel, Duplex Stainless - Custom metals available.
SHAFT	Chromemoly or Stainless Steel
MECHANICAL SEAL	Dual Tungsten or Silicon Carbide Mechanical Seal with Self Contained Seal Flushing System
BEARING HOUSING	Ductile Iron or Stainless Steel

ENGINE SPECS

- 118 / 125HP (93kW) Tier III John Deere Diesel Engine - Model 6068HF285 - 2200 RPM•
- Liquid Cooled, 12 Volt Power In-Line 4 Cycle Turbo Charge Diesel
- Electronic Fuel System
- Fuel Electronic Instrumental Control Panel
- 2 Year 2000-Hour Warranty

ENGINE PERFORMANCE DATA

Engine Speed (rpm)	2400	2200	2000	1800	1600	1400	1200	1000
Power (hp)	118	116	115	115	108	94	81	67
Torque (lb-ft)	273	298	316	334	355	354	354	354
BsFC (lb/hp-hr)	0.395	0.388	0.382	0.375	0.365	0.369	0.363	0.358
Fuel (gph)	7.0	6.8	6.5	6.1	5.2	4.9	4.1	3.4




PUMP CURVE

A pump curve is a graphical representation of a pumps ability to produce flow against a certain head. The science is matching a curve that is accurate for your project, leading to the proper pump selection and best efficiency.

EDDY Pumps are primarily used for high solids, slurry, sludge, and dewatering.

EDDY Pump - 6 Inch - Pump Curve

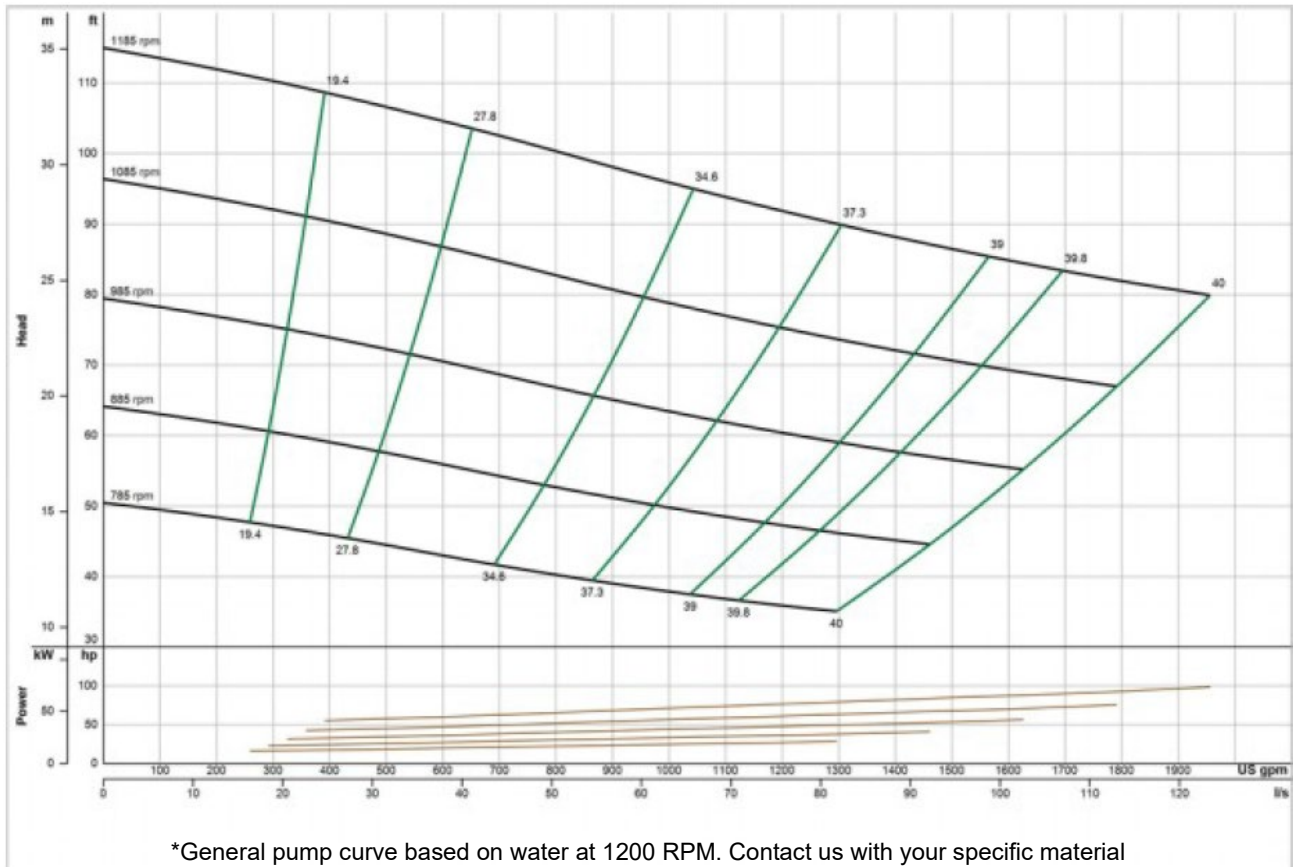

*General pump curve based on water at 1200 RPM. Contact us with your specific material for a custom pump curve.

WE PUMP SOLIDS, NOT WATER

CONTACT US



(619) 258-7020



info@EddyPump.com