

VISIT SITE NOW »

Self-Priming Excavator Pump Attachment 10-inches (SPE-10000)

MODEL #	
SPE-10000	

OPERATING LEVELS	
Min Flow	1200 GPM
Max Flow	5000 GPM
Head Range	5000 GPM
Discharge Size	10 inches
Suction Size	12 inches
Solids Handling	Solids up to 9 inches
Max Speed	1800 RPM
Percent Solids	Up to 40-70% Solids
CU YD Material HR	300-350

RECOMMENDED SENSORS	
Wireless Doppler Flow Meter	
RTK/GPS System for precision real-time dredging	



*Typical Deployment Photo. Dredge pumps can be deployed vertically or horizontally. Photos for general guidance. Contact us for further details.

REQUIRED EQUIPMENT TO OPERATE ATTACHMENT	
Cutterhead circuit requirements from excavator auxiliary power or from hydraulic power unit 18-25 GPM at 4250 psi	
10-inches DAE Slurry hose	

OPTIONAL EQUIPMENT TO ENHANCE OPERATION OF DREDGE	
Wireless Doppler Flow Meter	
RTK/GPS System for precision real-time dredging	

GENERAL SPECS		
Overall Weight (without optional equipment)	3,000 lbs	1360.78 kg


We pump up to 70% solids, not water.

VISIT SITE NOW »

PUMP CURVE

A pump curve is a graphical representation of a pumps ability to produce flow against a certain head. The science is matching a curve that is accurate for your project, leading to the proper pump selection and best efficiency. **EDDY Pumps** are primarily used for high solids, slurry, sludge, and dewatering.

EDDY Pump - Self-Priming Excavator Pump Attachment - 10 inches (SPE-10000) - Pump Curve

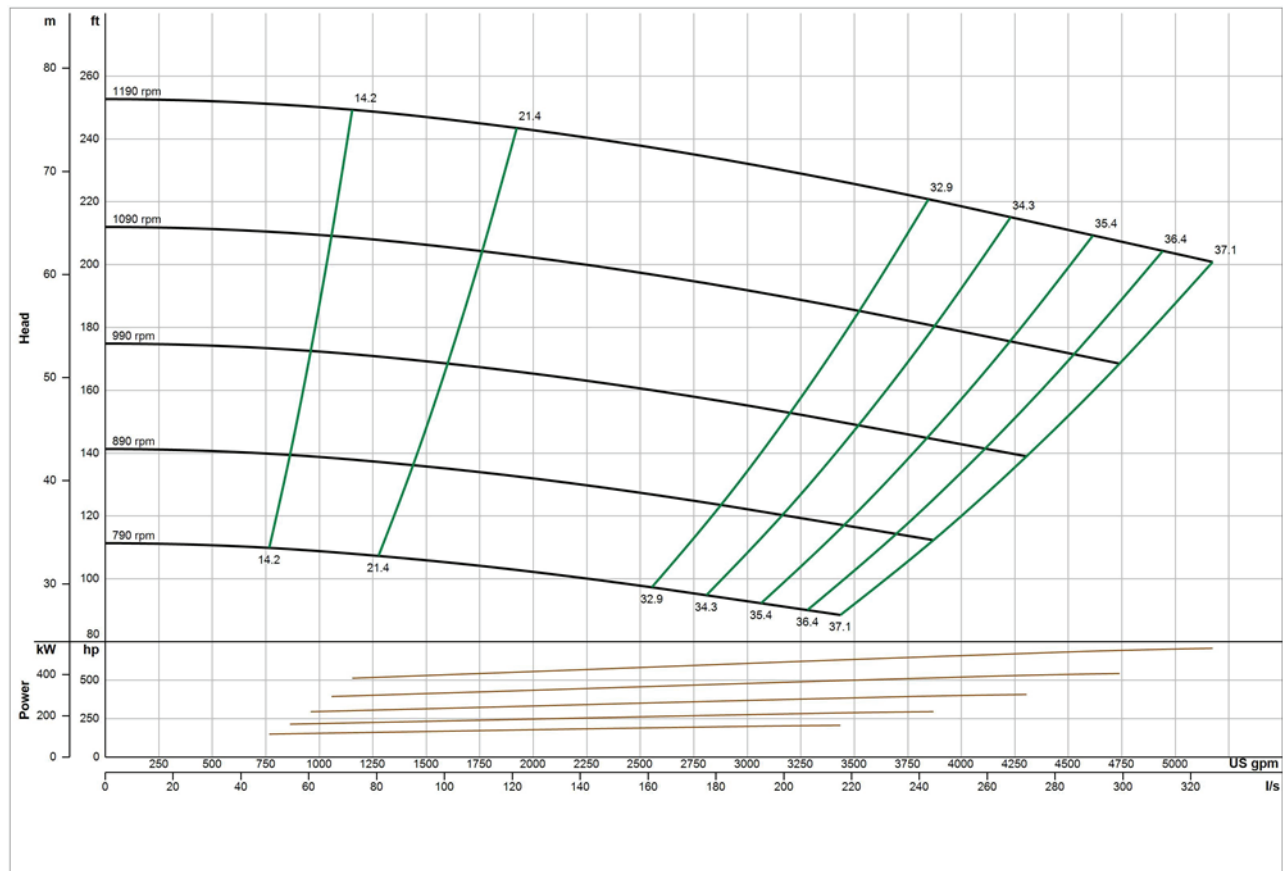

*General pump curve based on water with 1200 RPM motor. Contact us with your specific material for a custom pump curve.

CONTACT US



(619) 258-7020



info@EddyPump.com